

Technical Support

Should you have any questions regarding your TC30 microphone please contact us:

e-mail: Support@EarthworksAudio.com
phone: 1-603-654-6427 (9a.m. – 5p.m. ET)

For warranty and product return/exchange information please refer to the back of the enclosed Calibration Chart.



Earthworks, Inc.
37 Wilton Rd.
Milford, NH 03055 USA
Phone: 1-603-654-6427
Fax: 1-603-654-6107
<http://www.EarthworksAudio.com>



TC30 Omnidirectional Microphone Owner's Manual



Made in U.S.A.

Description

Earthworks TC30 is an omnidirectional (pressure) prepolarized condenser microphone directly coupled to a dedicated wideband, low output impedance preamplifier. The TC30 requires a standard 48V phantom power supply. It features a linear free-field frequency response from 9Hz to 30kHz (Fig. 2), fast impulse response (Fig. 3), very low handling noise, uniform polar pattern, and very high SPL handling capabilities. It exhibits no proximity effect.

Each microphone is delivered with its own calibration chart providing the individually measured frequency response curve. A mounting clip is included with the microphone.

Applications

Earthworks TC30 is easy to operate. Connect the microphone to a microphone preamplifier supplying 48V phantom power using a standard XLR microphone cable. *Please allow up to one minute for the microphone to settle.* Plugging in the microphone “hot” (phantom power already present at the input) will not damage the microphone, and is actually preferred for faster settling. It is normal for any phantom powered mic to “pop” when plugged in or powered up. Make sure to mute the signal to speakers or headphones when phantom power is first applied.

The TC30 is an excellent general-purpose omni. It is an ideal choice for close-miking louder sources like guitar, bass, piano, horns, and percussion. The TC30 is very popular for drum overheads. It is incredibly clean and distortion-free up to 150dB SPL while simultaneously capturing subtle details. Its fast, clean impulse performance yields remarkably transparent sound. The TC30 is an excellent room mic for ambiance in the studio and for

recording rehearsals and performances. It has no handling noise, no proximity effect, and is very forgiving in terms of placement.

This microphone has no removable parts.

Care of Microphones

Earthworks TC30 microphone is a precision instrument designed and built to provide years of top performance. Following these simple rules will help to protect your investment in the TC30:

- Avoid touching the front protective screen.
- Never attempt to disassemble the microphone – it cannot be opened.
- Avoid extreme heat and condensing humidity. Allow the microphone to warm up in the case when bringing it in from the cold weather. Rough handling may damage the microphone even if no visible marks are left.
- When not in use keep the TC30 in its case

Specifications

Frequency response:	9Hz to 30kHz +1/-3dB
Polar Pattern:	Omnidirectional (Fig. 4)
Sensitivity:	8mV/Pa (Typical)
Power Requirements:	48V Phantom, 10mA
Peak Acoustic Input:	150dB SPL
Output:	XLR (Fig. 1)
Output Impedance:	100Ω, balanced (50Ω ea. pin 2 & 3)
Minimum Load:	600Ω btw. pins 2 & 3
Noise:	27dBA equivalent
Dimensions L x D	229 x 22 mm (9 x .866 in.)
Weight:	225g (.5lb)

CE Compliant

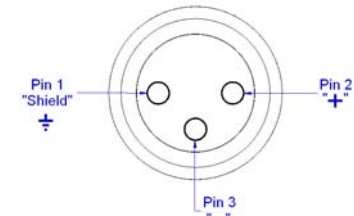


Fig. 1. XLR Output Connector Assignment of TC30

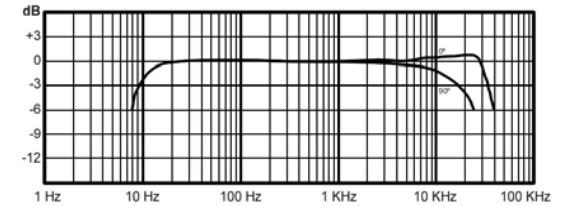


Fig. 2. Frequency Response (Typical) of TC30

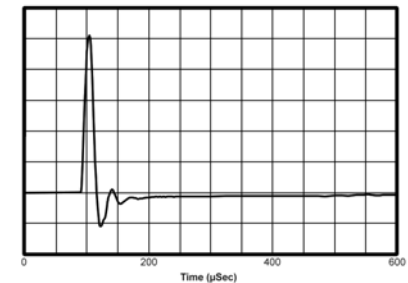


Fig. 3. Impulse Response (Typical) of TC30

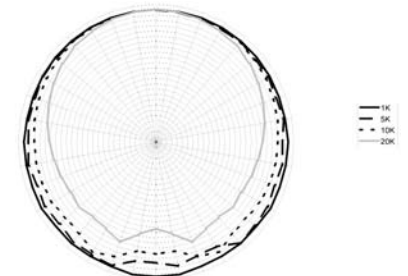


Fig. 4. Polar Response (Typical) of TC30, 1dB/div.

Specifications are subject to change without notice.